

A perspective view of a portable electronic device 10. The device has a rectangular body with a front face 20 and a top surface. On the front face, there is a rectangular display screen 28 and several circular buttons or indicators. A probe 15 is inserted into a port 24 on the top surface of the device. The probe 15 has a long, thin shaft with a rounded tip and a handle with a circular knob. The device 10 also features a circular port on the side and a small circular feature on the top surface.

FIG. 2

FIG. 2

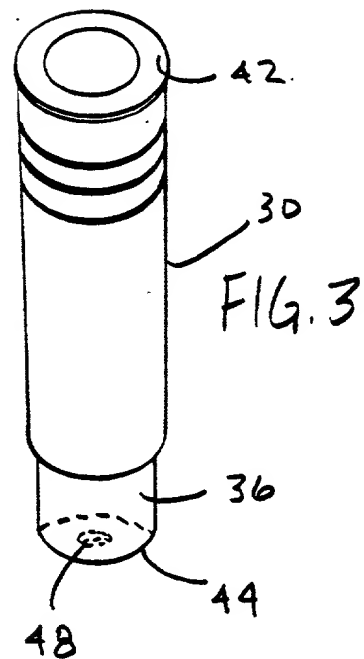


FIG. 3

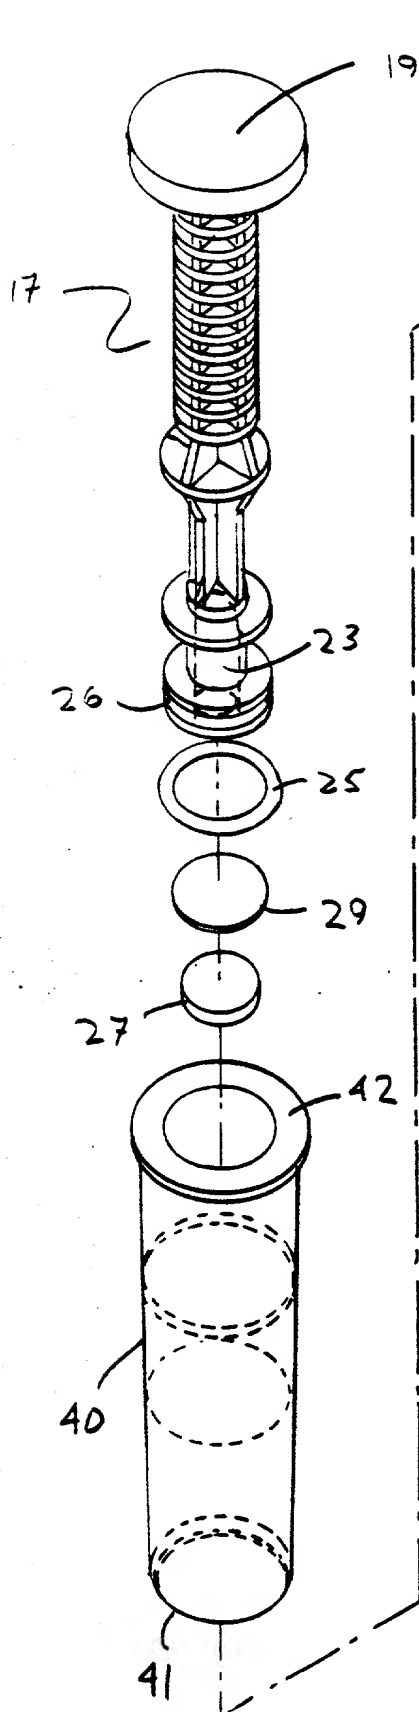


FIG. 4

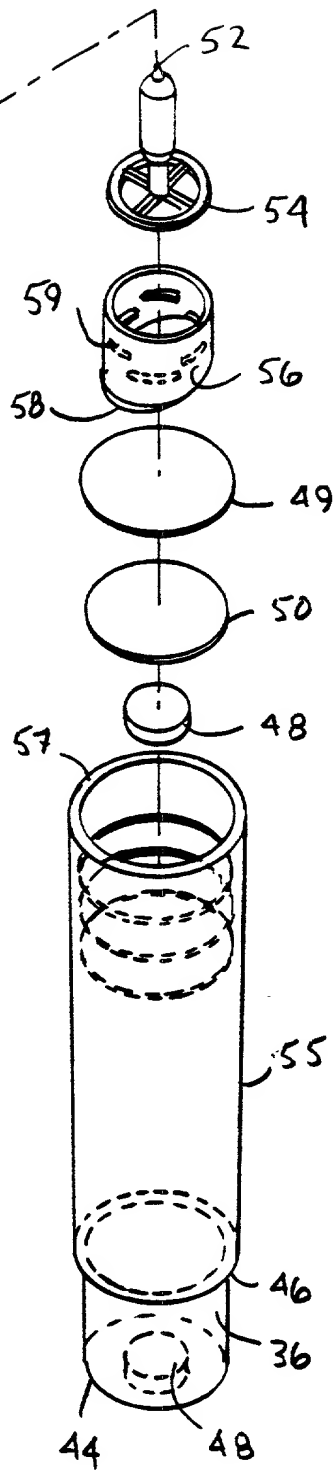
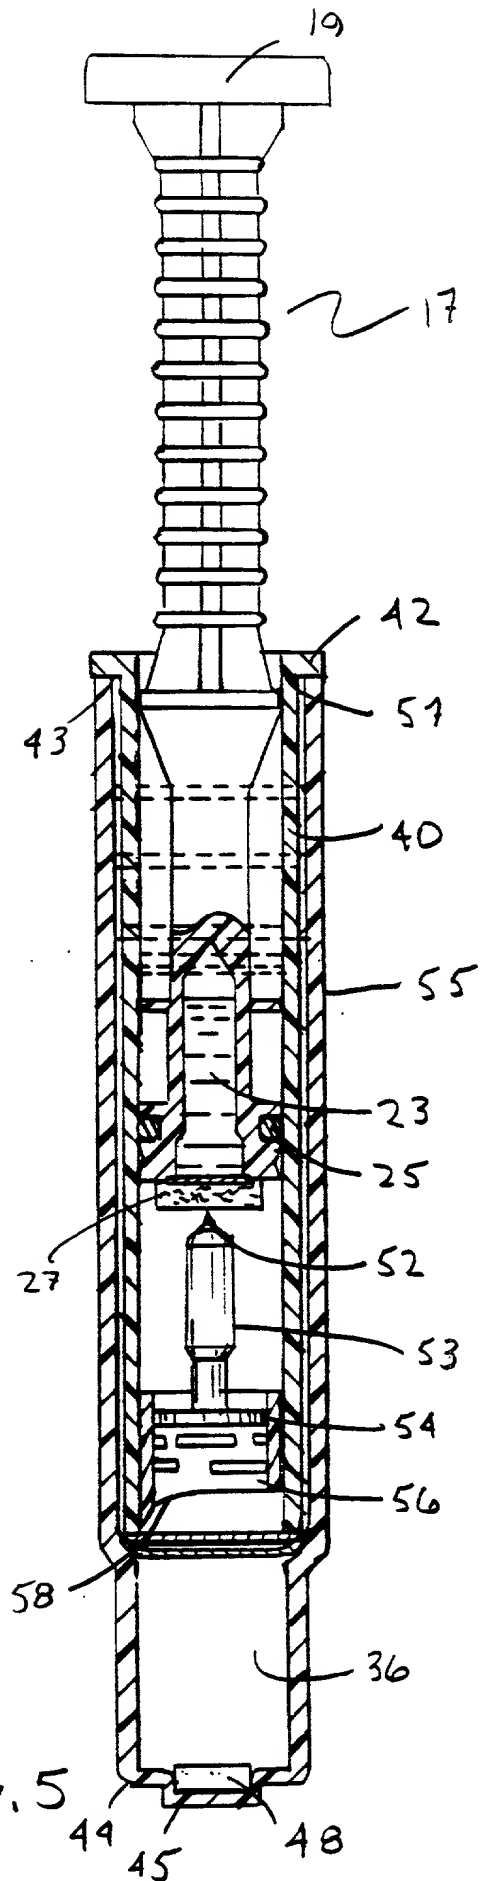


FIG. 5



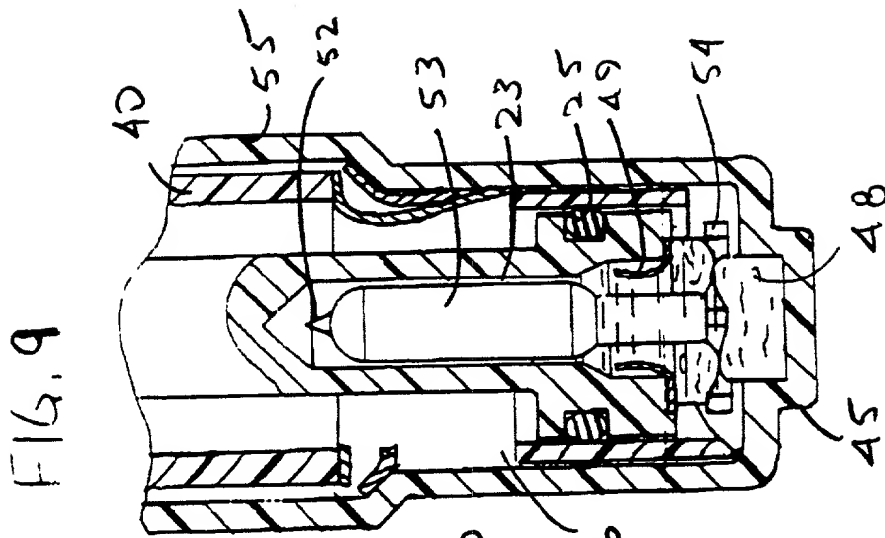
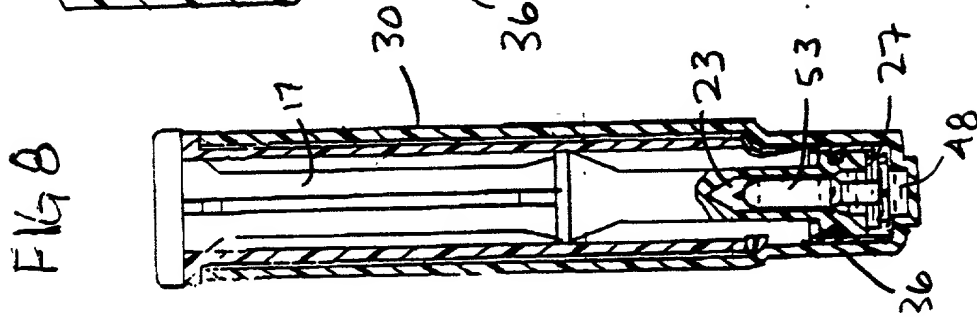
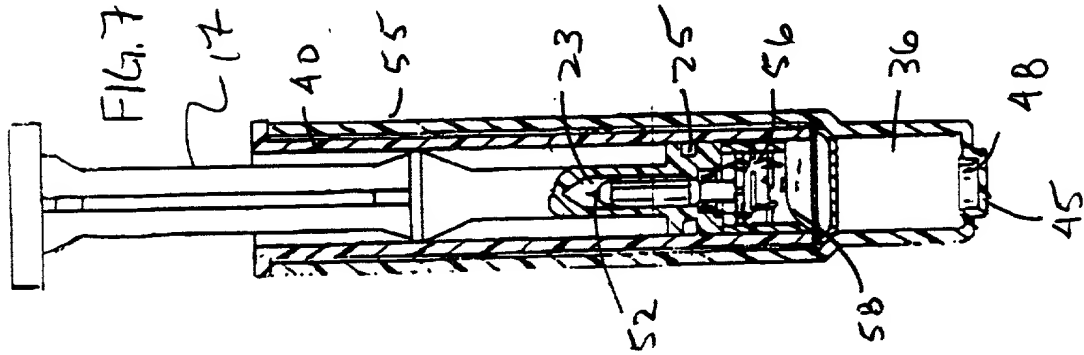
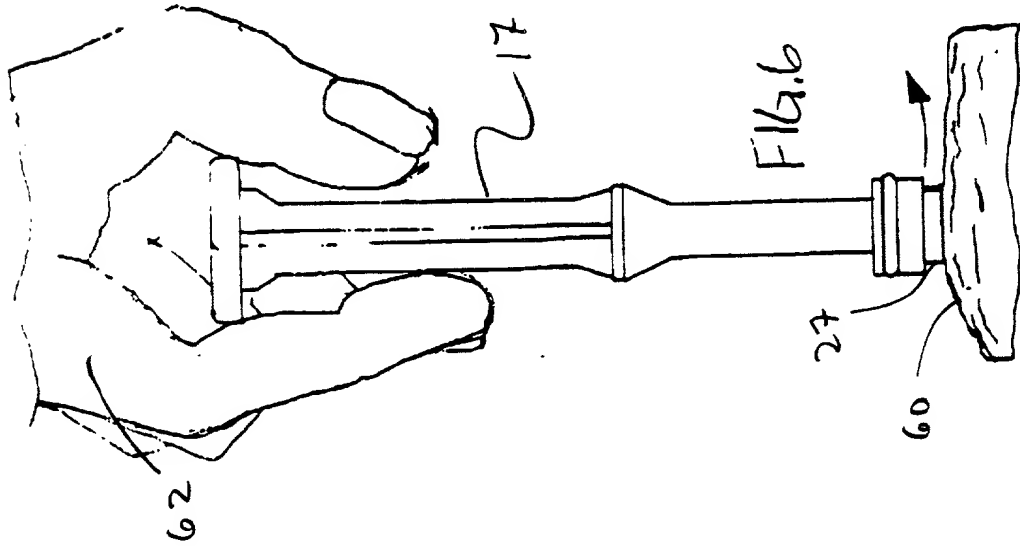


FIG. 10

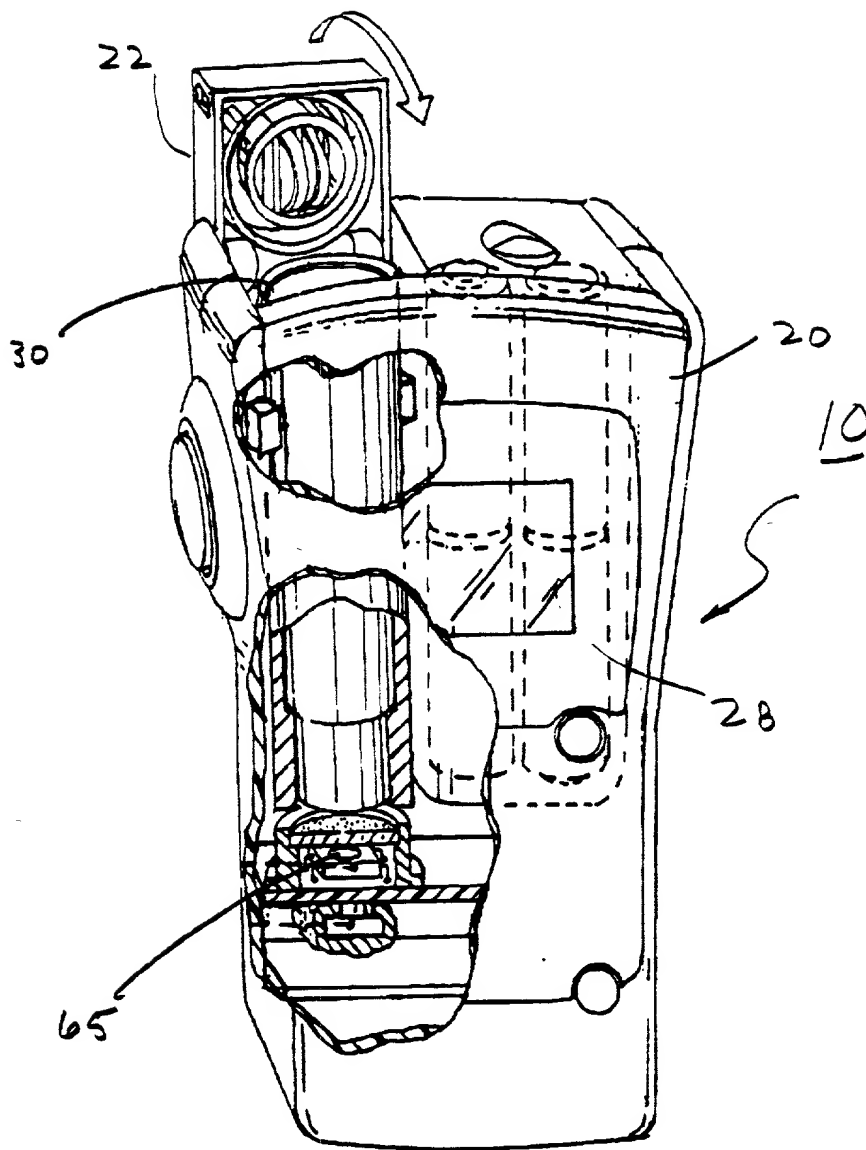


FIG. 10

TOP SECRET 00000000

AccuPoint Reagent Stability at 40 deg. C.

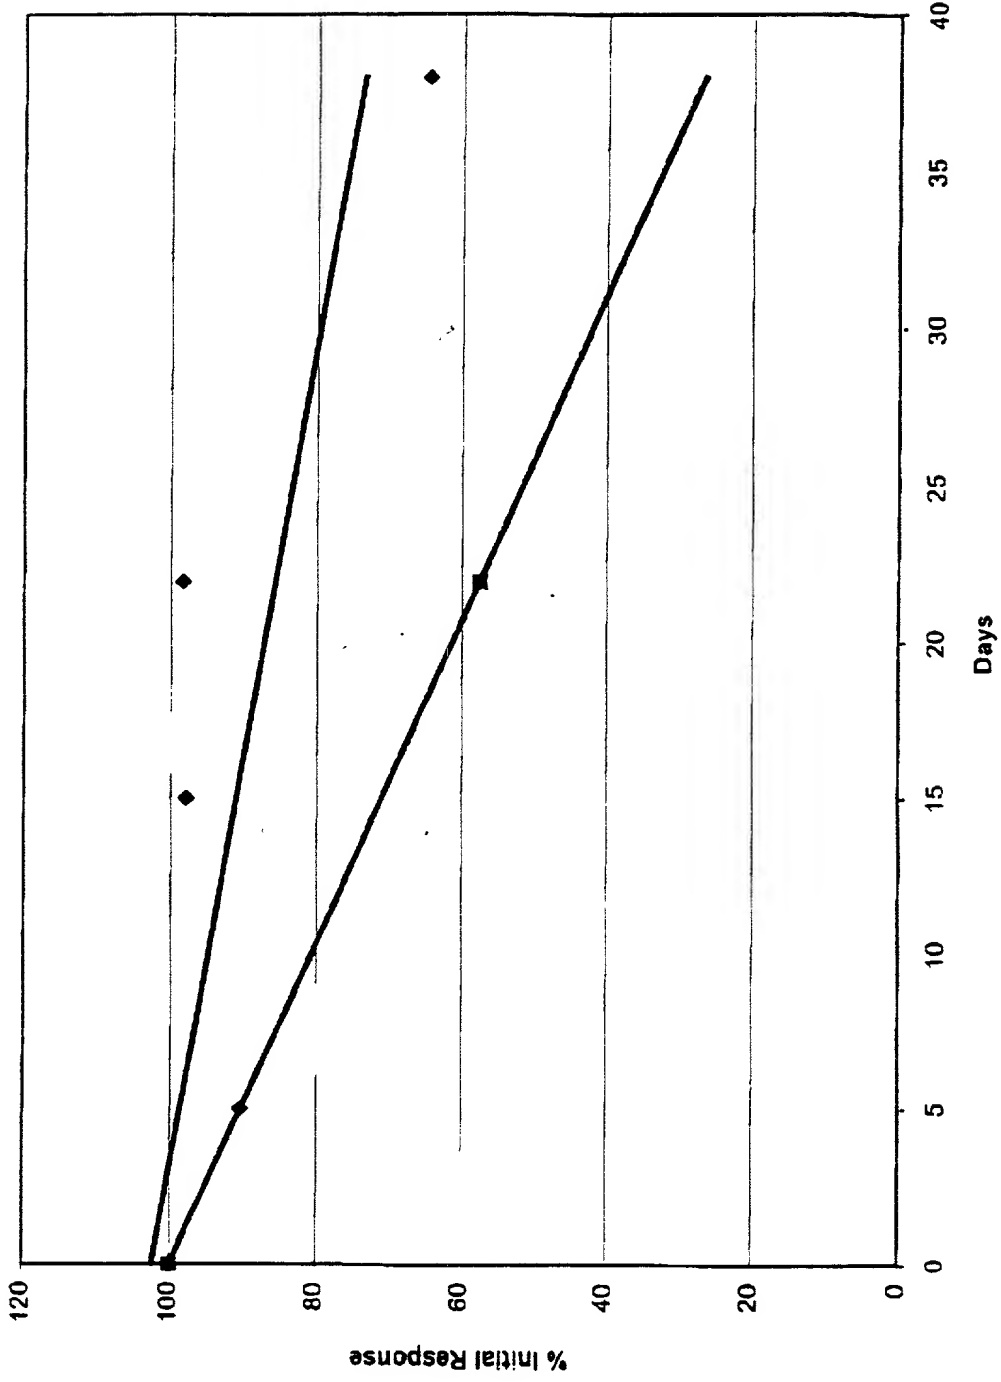


FIG 11

TABLE 20-03/28860

Effect of Trehalose on L/L Reaction

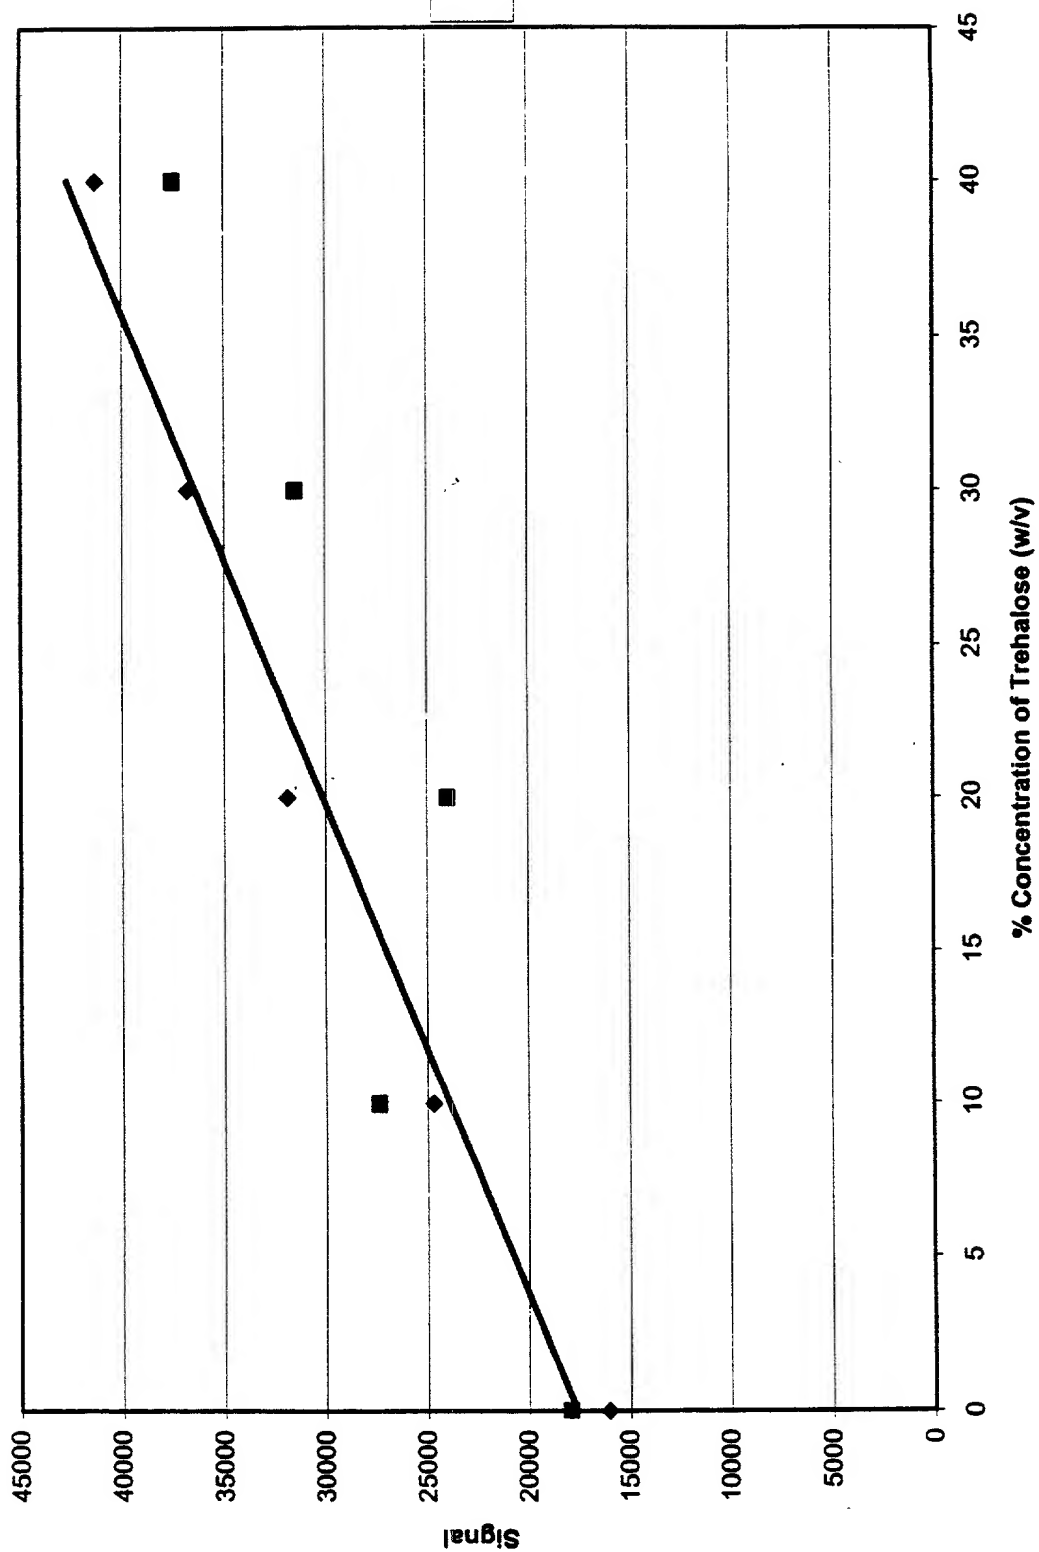


FIG 12